


**ROBUST
DETAIL**

E-FC-4

Approved Document E compliant

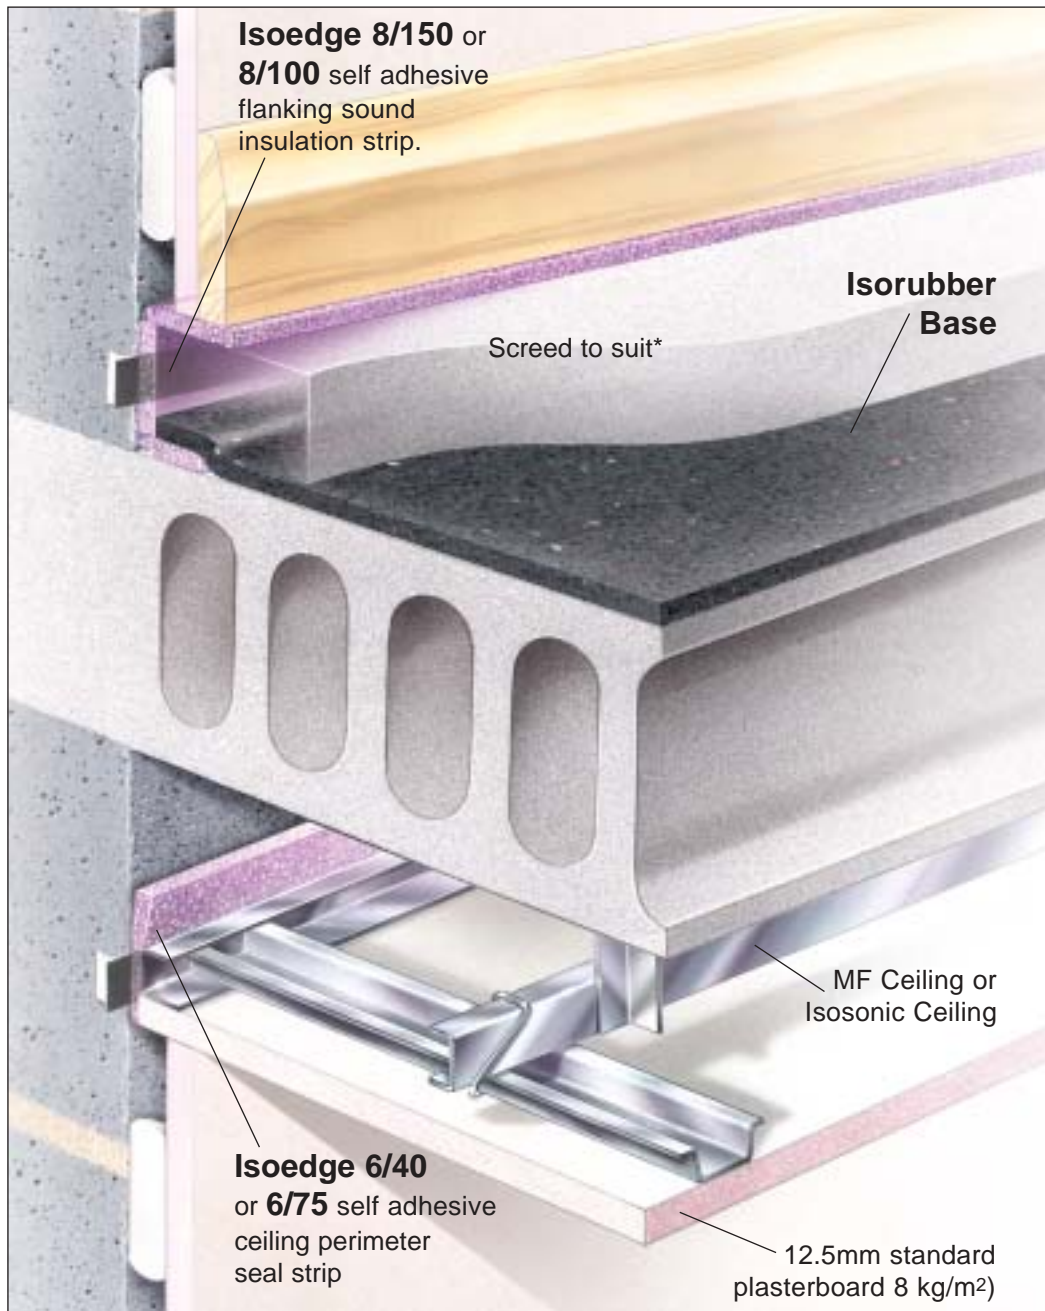

*including proprietary screeds

**Isosonic
Basefloor**
with MF Ceiling

*A thin, single layer
sound insulation
system for screed
finish floors.*

**An economic
traditional screed
solution suitable
for:**

- ▶ Sand/cement screed and proprietary screeds
- ▶ Hollow precast planks minimum depth 150mm
- ▶ MF ceilings- all proprietary brands
- ▶ External flanking wall internal block densities: Aircrete 450 - 800kg/m³
1350 to 1600kg/m³
1850 to 2300kg/m³

Isorubber Base-

tough puncture resistant underscreed resilient layer

Isoedge-

'easy fit' self adhesive fold-line cut flanking strip

For ROBUST DETAIL registered projects the 'Robust Detail Book' requirements must be strictly adhered to.

**Thermal
Economics**
THERMAL & SOUND INSULATION TECHNOLOGY

Thermal Economics Ltd Thermal House 8 Cardiff Road Luton Bedfordshire LU1 1PP
Tel:01582 450814 Fax:01582 429305 E-mail:info@thermal-economics.co.uk Web:www.thermal-economics.co.uk